


GE MH 18.0-EC/5.0 Set+MH-R

Cordless wall and ceiling sander Giraffe® with interchangeable head system 18.0 V

Order no. 504041

GTIN 4030293230057

- + Very handy, light-weight machine with optimum ease of operation. Provides comfortable and ergonomic working conditions
- + Brushless motor with greater efficiency and a longer service life
- + Fitted with innovative interchangeable head system. Sanding heads are attached and removed with a click
- + Segment sanding head with rotatable edge segment. This allows the sanding of surface transitions from wall to wall and wall to ceiling. The head's rotation follows the movement of the machine, without interruption of work.
- + Electronics: Speed preselection with adjustment wheel, overload protection, restart lock and temperature monitoring
- + Easy guiding: by optimal balance between motor and sanding head
- + Reliable force transmission and high flexibility thanks to the flexible drive shaft from. For decades established "FLEX technology". Thanks to this design principle the weight on the head of the Giraffe is reduced to a minimum. This facilitates handling.
- + Gimbal-mounted sanding head provides high flexibility and optimum adjustment for sanding walls and ceilings.
- + Effective dust extraction from between the brush ring and the sanding pad prevents clogging of the abrasive and promotes a dust-free working environment
- + Option of connecting the FLEX safety vacuum cleaners to the FLEX clip-system on the guide tube
- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + Dust-proof on/off switch
- + LED battery capacity display
- + FLEX battery system: suitable for all FLEX 18 V battery packs

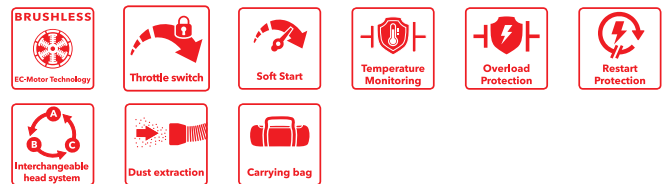

Technical data

| | |
|--------------------------------------|-----------------|
| Battery voltage | 18 V |
| Battery capacity | 2.5 / 5.0 Ah |
| Backing pad diameter | 225 mm |
| No-load speed | 1150 - 1800 rpm |
| Orbit rate, no load MH-T | 3950-6200 1 rpm |
| Orbit rate, no load MH-X | 3200-5000 1 rpm |
| Head angle of inclination | 100° |
| Tool holder, wall and ceiling sander | hook and loop |
| Number of supplied batteries | 2 Cont. |
| With charger | Yes |
| Length | 1440 mm |
| Weight without battery pack | 2.8 kg |

Standard equipment

- 1 Rotary sanding head with edge segment (457183)
- 1 Clip-on quick clamping ring red (406023)
- 1 Carrying bag (408867)
- 2 Li-Ion rechargeable battery pack 18 V (532733)
- 1 Rapid charger 12/18 V (532280)