

MS 1706 FR


Wall chaser for push and pull cutting

Order no. 329673

GTIN 4030293124813



- + Microprocessor electronics: with tachogenerator constant speed control, soft start, overload protection and temperature monitoring
- + Patented swivel-mounted motor (EP1693169) allows for push and pull cutting.
- + Optimal dust extraction and maximum safety due to enclosed guard
- + Tool-free blade changing and slit width adjustment
- + Rotating adaptor for dust extractor
- + Tool-free cutting depth adjustment
- + Plunge cut stop
- + Chases two parallel slots up to 35 mm deep and 30 mm wide
- + Slot breaker for easy removal of the remaining material without a hammer
- + This machine is also available in 110 V

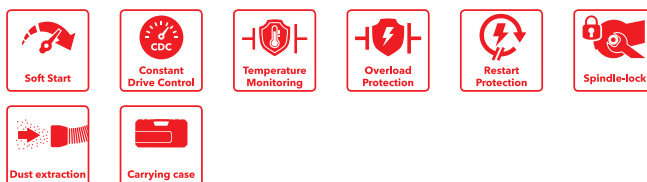

Technical data

Power consumption	1400 W
Power output	950 W
Voltage	230 V
Frequency	50/60 Hz
Cutting depth	0-35 mm
Groove width	10-30 mm
Disc diameter	140 mm
Max. no-load speed	7500 rpm
Tool holder, wall chaser	M14
Cable length	4,0 m
Dimensions WxLxH	410 x 180 x 250 mm
Weight	4,6 kg

Standard equipment

- 2 Diamantjet VI - Speedcut (334464)
- 1 Side handle, red (194034)
- 1 SDS-Clic quick-clamp nut (253049)
- 1 Distance spacers (251478)
- 2 Stacking discs (318914)
- 2 Clamping flange, SW 14 (191612)
- 1 Slot breaker (229253)
- 1 Clip adapter (408360)
- 3 Cable clip (252188)
- 1 Carrying case (327034)