www.flex-tools.com

this is proformance FLEX

PXCE 18-EC Set


18 V cordless polisher, rotary, random orbital with free-running and forced rotation

Order no. 535578

GTIN 4030293294189



- The ideal cordless polisher for every vehicle refurbisher and painter and for the spot repair sector
- More flexible and easier than ever before, from sanding to hologram-free finishing with a single unit
- Intuitive touch panel for speed adjustment. Lock function prevents accidental operation – can be activated while wearing gloves
- Innovative quick-change system for exchanging all three rotary and random orbital free-running/forced rotation drive types without using tools
- For rotary work – disc sizes 30, 50 and 75 mm can be used
- Suitable for random orbital free-running work with 3/6/12 mm stroke and for random orbital forced-rotation work with 6 mm stroke. Disc sizes 30, 50 and 75 mm can be used
- Newly-developed motor design for maximum noise and vibration reduction
- Perfect ergonomics and flexible grip options because of ist ideally placed softgrip surfaces
- Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- Integrated three-level LED lamp with a light temperature of 2,500 to 6,500 K, enabling accurate adjustment to the job at hand
- Brushless motor with greater efficiency and a longer service life
- Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- LED battery capacity display
- FLEX battery system: suitable for all FLEX 18 V battery packs

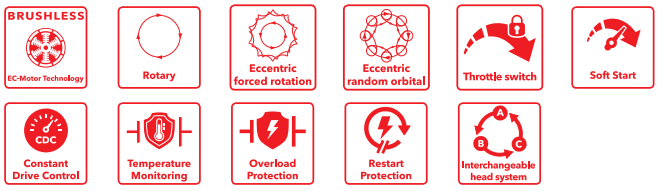

Technical data

Battery voltage	18 V
Max. support plate size	75 mm
Polishing stroke	3 / 6 / 12 mm
No-load speed	1000 - 6000 rpm
Orbit rate, no load	2000 - 12000 rpm
Number of supplied batteries	2 Cont.
With charger	Yes
Dimensions WxLxH	282 x 79 x 86 mm
Weight without battery pack	0.9 kg
Sound pressure level	67 dB(A)
Vibration	2.8 m/s²

Standard equipment

1 Adapter eccentrically free-running, 3 mm stroke (537154)
1 Adapter eccentrically free-running, 6 mm stroke (537155)
1 Free spin random orbital adapter, 12 mm stroke (537156)
1 Eccentric, forced-rotation adapter, 6 mm stroke (537157)
1 Rotary adapter (537152)
1 Extension for DT-P PXCE (537153)
1 Special adhesive pad, cushioned (537161)
1 Special hook-and-loop pad, cushioned (537158)
1 Special hook-and-loop pad, cushioned (537159)
1 Special hook-and-loop pad, cushioned (537160)
1 Rapid charger 12/18 V (535296)
2 Li-Ion rechargeable battery pack 18 V (535440)