


# JS 18.0-EC

**Cordless jigsaw 18.0 V**

**Order no. 493775**

**GTIN 4030293223738**

- + New generation of brushless motors delivering high efficiency and performance
- + Continuously variable cutting speed setting via potentiometer wheel with automatic start-up in position A
- + Electronic switch can be operated from both sides
- + Tool-free saw blade change with quick-clamping system and eject function
- + Orbital stroke: 4 settings for higher cutting rate
- + Double roller jigsaw blade guide for precise cuts with accurate angles
- + Free view of the marking thanks to integrated blow function
- + Perfect ergonomics thanks to ideally located SoftGrip surfaces
- + Low-vibration and comfortable sawing
- + Saw bench adjustment for bevel cuts of up to 45°, 0-lock. Can be set off backwards for sawing close to edges
- + Stable base plate with removable plastic guide block for the protection of delicate surfaces
- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + With automatic start-up, overload protection
- + Vacuum flange Ø 27 mm, for a cleaner workplace and clear view of the cut
- + Removable chip screen, for tear-free cuts and for guiding the saw blade
- + Integrated LED lamp for optimum illumination of the work area.
- + LED battery capacity display
- + FLEX battery system: suitable for all FLEX 18 V battery packs. Delivery does not include battery and charger

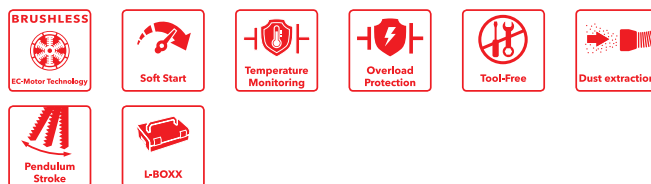

## Technical data

|                                |                    |
|--------------------------------|--------------------|
| Battery voltage                | 18 V               |
| Battery capacity               | 2,5 / 5,0 / 8,0 Ah |
| Orbit rate, no load            | 0 - 3500 rpm       |
| Stroke                         | 26 mm              |
| Pendulum stroke stages         | 4 Steps            |
| Speed settings                 | 1-5 +A Steps       |
| Pivoting range                 | 0-45°              |
| Max. material thickness, wood  | 120 mm             |
| Max. material thickness, metal | 8 mm               |
| Dimensions WxLxH               | 275 x 82 x 197 mm  |
| Weight without battery pack    | 2,1 kg             |

## Standard equipment

- 1 Sliding shoe (490237)
- 1 Hexagon socket wrench (102229)
- 1 Anti-splinter guard (490229)
- 1 Adapter (490245)
- 1 Carrying case L-BOXX® (414085)
- 1 Case insert (490210)
- 1 Protection against flying swarf, closed