

# XCE 28 14-EC C


Eccentric polisher with forced rotation

Order no. 532986

GTIN 4030293268265



- ⊕ New generation of brushless motors delivering high efficiency and performance
- ⊕ Microprocessor electronics: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- ⊕ Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- ⊕ Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- ⊕ Ideal speed range for automotive, maritime and aviation applications
- ⊕ Perfect for removing medium scratches and for eliminating signs of wear and holograms
- ⊕ Maximum efficiency in one step with the FLEX 1-step system, with the violet sponge and violet polish
- ⊕ Newly-developed high-performance gearbox for maximum noise and vibration reduction
- ⊕ Additional external gearbox enables rotary positive drive with simultaneous random-orbital movement
- ⊕ Ergonomically-shaped handle areas with soft grip for perfect guidance on the surface
- ⊕ Flat gear head reduces the distance from the surface. This allows the tool to be guided perfectly in any position
- ⊕ With rubberised resting bar for safe setting down

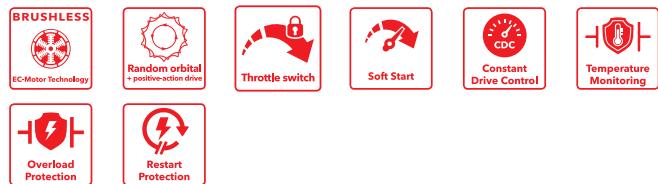

## Technical data

Power consumption	1400 W
Voltage	230 V
Frequency	50/60 Hz
Max. support plate size	150 mm
Max. polishing disc size	150 mm
Polishing stroke	8 mm
No-load speed	225 - 700 rpm
Orbit rate, no load	2700 - 8700 rpm
Cable length	6 m
Cable type	PUR
Weight	2,2 kg
Sound pressure level	79 dB(A)
Vibration	4,7 m/s <sup>2</sup>

## Standard equipment

1 Special hook-and-loop pad, cushioned (487988)