

# XFE 2 15 18-EC C


**Cordless eccentric polisher with random orbital  
18 V**

**Order no. 534661**

**GTIN 4030293285019**



- + As powerful as a cable polisher over the entire battery life
- + CDC constant electronics prevent speed fluctuations
- + Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- + Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- + Ideal speed range for automotive, maritime and aviation applications
- + Perfect for eliminating holograms and removing light scratches
- + Maximum deep sheen in the FLEX 2-step system, with the black sponge and black polish
- + New generation of brushless motors delivering high efficiency and performance
- + Newly-developed high-performance gearbox for maximum noise and vibration reduction
- + Magnet integration stabilises the disc run and prevents long overrunning of the disc
- + Ergonomically-shaped handle areas with soft grip for perfect guidance on the surface
- + Flat gear head reduces the distance from the surface. This allows the tool to be guided perfectly in any position
- + With rubberised resting bar for safe setting down
- + Microprocessor control with soft start, restart protection after power failure, temperature monitoring, overload protection
- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + LED battery capacity display
- + FLEX battery system: suitable for all FLEX 18 V battery packs. Delivery does not include battery and charger

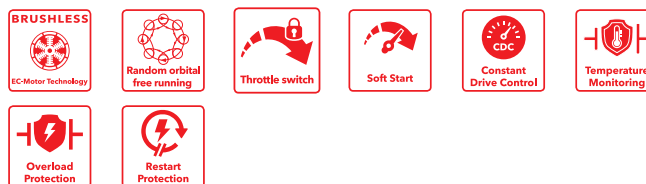

## Technical data

|                             |                      |
|-----------------------------|----------------------|
| Battery voltage             | 18 V                 |
| Battery capacity            | 2,5 / 5,0 / 8,0 Ah   |
| Max. support plate size     | 150 mm               |
| Polishing stroke            | 15 mm                |
| No-load speed               | 1350 - 4350 rpm      |
| Orbit rate, no load         | 2700 - 8700 rpm      |
| Dimensions WxLxH            | 388 x 125 x 126 mm   |
| Weight without battery pack | 2,1 kg               |
| Sound pressure level        | 72 dB(A)             |
| Vibration                   | 7,2 m/s <sup>2</sup> |

## Standard equipment

1 Special hook-and-loop pad, cushioned (487988)