

MXE 1202 + HP2 140


1200 watt 2-speed mixer with 3-level speed switch

Order no. 495921

GTIN 4030293224483



- + Large, rugged 2-gear unit with optimum ratios for powerful torque and correct speed for different materials
- + Full-wave electronic control: with soft start, temperature monitoring, overload protection and accelerator switch - for a controlled run-up to the optimum mixing speed. Sustained power in all speed ranges
- + Comfortable 3-level switch can be reached from the grip position without interrupting work, protected by a rubber sleeve. Level 1: cleaning, level 2: stirring up, level 3: mixing
- + On/off switch with lock and protection at power interruption. Ideal for stationary operation in a mixing station
- + The flexible rubber sleeve over the on/off switch prevents the ingress of dirt. No malfunctions caused by jammed switches
- + Ergonomic handles on the drive unit: low weight, fatigue-free arm posture and upright body posture allow comfortable, ergonomic operation
- + Four corner guards with rubber buffer provide secure storage during transportation and offer protection against shocks and impacts at the building site
- + Protective cap above the motor housing guides the cooling air flow and prevents the ingress of splashing water
- + Spindle lock with start-up protection. Simplifies exchange of the mixing paddle
- + For mixed applications up to 60 kg
- + With mixing paddle HP2 for mixture: pasty to tough. Tile adhesive, grout, filler compound, adhesive, finished plaster, adhesive mortar, ...

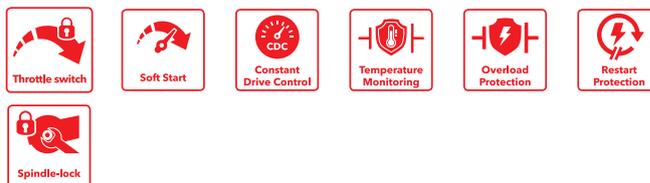

Technical data

Power consumption	1200 W
Power output	710 W
Voltage	230 V
Frequency	50/60 Hz
Max. mixing basket diameter	140 mm
Tool holder, mixer	M14
No-load speed, 1st gear	0 - 210/325/530 rpm
No-load speed, 2nd gear	0 - 320/490/780 rpm
Clamping collar diameter	53 mm
Cable length	4,0 m
Dimensions WxLxH	405 x 215 x 340 mm
Weight	4,8 kg

Standard equipment

- 1 Helix paddle WR2 (368997)
- 1 Open-ended wrench SW 22 (439975)

www.flex-tools.com

this is performance **FLEX**