

CER 18.0-EC/5.0 Set


Cordless edge milling tool and router 18 V

Order no. 531636

GTIN 4030293254763



- + An edge milling cutter and router combined. Toolless conversion from the edge milling cutter to the router
- + Quick and easy cutter change thanks to integrated spindle lock. The collet can be used for milling cutters with a shank diameter of up to 8 mm
- + With scale zero function, milling depth adjustment via turret stop and infinitely variable milling depth fine adjustment via rotating ring
- + The milling table with rubber-coated handles and clamping function enables safe guidance. The Plexiglas base plate always gives the user a clear view of the milling cutter for perfect results
- + For a wide range of applications in woodworking, renovation, drywall construction and mould making. Milling of corner joints, joints, curves/contours with templates, re-milling of laminate profiles. Milling solid wood edges, recesses and grooves with templates and guide rings, making templates for production, etc.
- + Brushless motor with greater efficiency and a longer service life
- + Electronic quick-acting brake
- + Variable speed adjustment (6 settings)
- + Connector for external dust extraction Ø 36 mm or step adapter
- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + LED battery capacity display
- + FLEX battery system: suitable for all FLEX 18 V battery packs

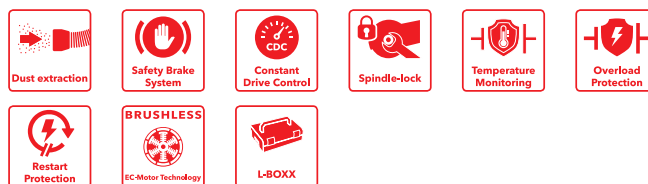

Technical data

No-load speed	15.000-30.000 rpm
Collet diameter	8mm
Milling stroke (depth)	50 mm
Sound pressure level in acc. with EN 60745	78 dB(A)
Vibration in acc. with EN 60745	1.5 m/s ²
Battery voltage	18 V
Battery capacity	2.5 / 5.0 / 8.0 Ah
Weight without battery pack	1.8 kg
With charger	Yes
Number of supplied batteries	2 Cont.

Standard equipment

- 1 Extraction hood (531654)
- 1 Quick-action stop (531653)
- 1 Base plate, round (531655)
- 1 Collet (531656)
- 1 Collet (531657)
- 1 Base plate D-format
- 1 Milling cage (531650)
- 1 Milling cage, parallel stop (531651)
- 1 Milling cage, extraction guard (531652)
- 1 Open-ended wrench SW 17 (530200)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (531659)
- 2 Li-Ion rechargeable battery pack 18 V (532733)
- 1 Rapid charger 12/18 V (532280)