

# GCE 6-EC Kit MH-R


Handy-Giraffe® wall and ceiling sander with interchangeable head system

Order no. 504122

GTIN 4030293230125



- + Electronic control: stepless speed selection, constant speed, overload protection and temperature monitoring
- + Brushless motor with greater efficiency and a longer service life
- + Completely cast electronic components prevents damage due to metal dust. The 3-fold winding protection reduces motor wear, increases service life
- + Grip hood for easy handling and precise working
- + Fitted with innovative interchangeable head system. Sanding heads are attached and removed with a click
- + Segment sanding head with rotatable edge segment. This allows the sanding of surface transitions from wall to wall and wall to ceiling. The head's rotation follows the movement of the machine, without interruption of work.
- + Effective dust extraction from between the brush ring and the sanding pad prevents clogging of the abrasive and promotes a dust-free working environment
- + Defined hose guidance and effective dust extraction due to large hose cross-section. The suction hose is directly attached to the tool by the FLEX clip-system
- + Lightweight and easy-to-use on small surfaces, tight spaces
- + Ideally suited for sanding plaster boards, solid styropor insulation slabs, preparation for painting

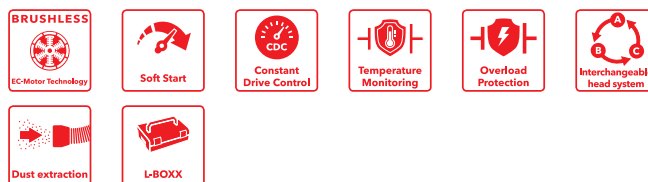

## Technical data

Power consumption	600 W
Power output	400 W
Voltage	230 V
Frequency	50/60 Hz
Backing pad diameter	225 mm
No-load speed	1100 - 1650 rpm
Orbit rate, no load MH-T	3800-5700 1 rpm
Orbit rate, no load MH-X	3100-4600 1 rpm
Tool holder, wall and ceiling sander	hook and loop
Cable length	4,0 m
Length	360 mm
Dimensions WxLxH	360 x 260 x 210 mm
Weight	1,2 kg

## Standard equipment

- 1 Rotary sanding head with edge segment (457183)
- 1 Carrying case L-BOXX® (414107)
- 1 Case insert (500798)