


# JSP 12-EC

Cordless jigsaw 12 V

Order no. 531317

GTIN 4030293251571

- + New generation of brushless motors delivering high efficiency and performance
- + Continuously variable cutting speed setting via potentiometer wheel with automatic start-up in position A
- + Tool-free saw blade change with quick-clamping system and eject function
- + Orbital stroke: 4 settings for higher cutting rate
- + Double roller jigsaw blade guide for precise cuts with accurate angles
- + Free view of the marking thanks to integrated blow function
- + Perfect ergonomics thanks to ideally located SoftGrip surfaces
- + Low-vibration and comfortable sawing
- + Saw bench adjustment for bevel cuts of up to 45°, 0-lock. Can be set off backwards for sawing close to edges
- + Stable base plate with removable plastic guide block for the protection of delicate surfaces
- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + With automatic start-up, overload protection
- + Vacuum flange Ø 27 mm, for a cleaner workplace and clear view of the cut
- + Removable chip screen, for tear-free cuts and for guiding the saw blade
- + Integrated LED lamp for optimum illumination of the work area.
- + LED battery capacity display
- + FLEX battery system: suitable for all FLEX 12 V battery packs. Delivery does not include battery and charger

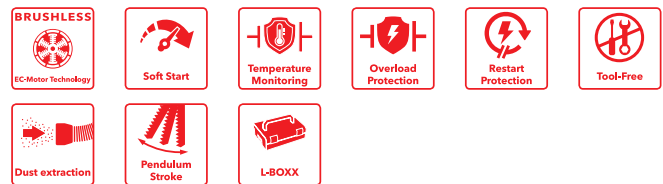

## Technical data

|                                |                   |
|--------------------------------|-------------------|
| Battery voltage                | 12 V              |
| Battery capacity               | 2.5 / 5.0 Ah      |
| Orbit rate, no load            | 800 - 3000 rpm    |
| Stroke                         | 23 mm             |
| Pendulum stroke stages         | 4 Steps           |
| Speed settings                 | 1-5 +A Steps      |
| Pivoting range                 | 0-45°             |
| Max. material thickness, wood  | 90 mm             |
| Max. material thickness, metal | 10 mm             |
| Dimensions WxLxH               | 220 x 69 x 183 mm |
| Weight without battery pack    | 1.46 kg           |
| Weight                         |                   |

## Standard equipment

- 1 Protection against flying swarf, closed
- 1 Anti-splinter guard (490229)
- 1 Extraction adapter Ø 27
- 1 Hexagon socket wrench, SW 3
- 1 Sliding shoe
- 1 Carrying case L-BOXX® (414085)
- 1 Case insert (533166)