

MXE 1200 + HP2 140


1200 watt 1-speed mixer with 3-level speed switch

Order no. 495913

GTIN 4030293224476



- ⊕ Large, rugged single-speed gear unit with optimum gear ratio for high torque
- ⊕ Full-wave electronic control: with soft start, temperature monitoring, overload protection and accelerator switch - for a controlled run-up to the optimum mixing speed. Sustained power in all speed ranges
- ⊕ Comfortable 3-level switch can be reached from the grip position without interrupting work, protected by a rubber sleeve. Level 1: cleaning, level 2: stirring up, level 3: mixing
- ⊕ On/off switch with lock and protection at power interruption. Ideal for stationary operation in a mixing station
- ⊕ The flexible rubber sleeve over the on/off switch prevents the ingress of dirt. No malfunctions caused by jammed switches
- ⊕ Ergonomic handles on the drive unit: low weight, fatigue-free arm posture and upright body posture allow comfortable, ergonomic operation
- ⊕ Four corner guards with rubber buffer provide secure storage during transportation and offer protection against shocks and impacts at the building site
- ⊕ Protective cap above the motor housing guides the cooling air flow and prevents the ingress of splashing water
- ⊕ Spindle lock with start-up protection. Simplifies exchange of the mixing paddle
- ⊕ For mixed applications up to 60 kg
- ⊕ With mixing paddle HP2 for mixture: pasty to tough. Tile adhesive, grout, filler compound, adhesive, finished plaster, adhesive mortar, ...

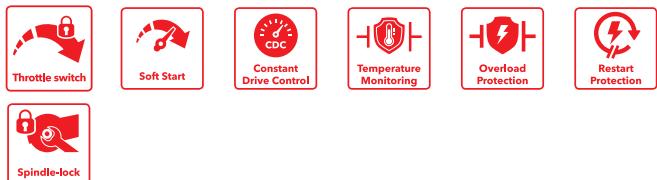

Technical data

| | |
|-----------------------------|---------------------|
| Power consumption | 1200 W |
| Power output | 710 W |
| Voltage | 230 V |
| Frequency | 50/60 Hz |
| Max. mixing basket diameter | 140 mm |
| Tool holder, mixer | M14 |
| No-load speed, 1st gear | 0 - 210/325/530 rpm |
| Clamping collar diameter | 53 mm |
| Cable length | 4.0 m |
| Dimensions WxLxH | 405 x 215 x 340 mm |
| Weight | 4.6 kg |

Standard equipment

1 Open-ended wrench SW 22 (439975)
1 Helix paddle HP2 (534028)

www.flex-tools.com

this is proformance

FLEX