

# XCE 8 150 18-EC C


**Cordless eccentric polisher with forced rotation  
18 V**

**Order no. 532646**

**GTIN 4030293264861**



- + As powerful as a cable polisher over the entire battery life
- + CDC constant electronics prevent speed fluctuations
- + Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- + Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- + Ideal speed range for automotive, maritime and aviation applications
- + Perfect for removing medium scratches and for eliminating signs of wear and holograms
- + Maximum efficiency in one step with the FLEX 1-step system, with the violet sponge and violet polish
- + New generation of brushless motors delivering high efficiency and performance
- + Newly-developed high-performance gearbox for maximum noise and vibration reduction
- + Additional external gearbox enables rotary positive drive with simultaneous random-orbital movement
- + Ergonomically-shaped handle areas with soft grip for perfect guidance on the surface
- + Flat gear head reduces the distance from the surface. This allows the tool to be guided perfectly in any position
- + With rubberised resting bar for safe setting down
- + Microprocessor control with soft start, restart protection after power failure, temperature monitoring, overload protection
- + Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- + LED battery capacity display
- + FLEX battery system: suitable for all FLEX 18 V battery packs. Delivery does not include battery and charger

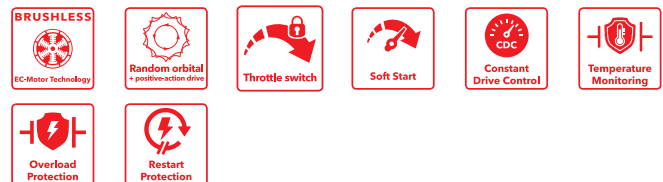

## Technical data

|                             |                    |
|-----------------------------|--------------------|
| Battery voltage             | 18 V               |
| Battery capacity            | 2.5 / 5.0 / 8.0 Ah |
| Max. support plate size     | 150 mm             |
| Polishing stroke            | 8 mm               |
| No-load speed               | 225 - 700 rpm      |
| Orbit rate, no load         | 2700 - 8700 rpm    |
| Dimensions WxLxH            | 388 x 125 x 126 mm |
| Weight without battery pack | 2.0 kg             |
| Sound pressure level        | 76 dB(A)           |
| Vibration                   | 5 m/s <sup>2</sup> |

## Standard equipment

1 Special hook-and-loop pad, cushioned (487988)

