


## SE 14-2 150 Set

**SUPRAFLEX, the sanding specialist for painted surfaces, wood, stone and metal**

**Order no. 419206**

**GTIN 4030293181274**

- + VR electronic control: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- + Powerful 1400 watt motor with highly-efficient ventilator for optimum cooling
- + Optimised air flow for optimum cooling of motor and gear. No annoying exhaust air for the user
- + Innovative combination of planetary and angular gears reduces noise to an absolute minimum
- + Flat gear head reduces distance to the surface. The machine can therefore be operated safely in any position.
- + Grip hood: ergonomically shaped with SoftGrip. The machine can be controlled with precision and is always comfortable yet secure to hold.
- + Completely cast electronic components prevents damage due to metal dust. Protective guard on the winding end of the armature and plated winding on the armature. The 3-fold winding protection reduces motor wear, increases service life.
- + Epoxy-coated winding on the field coil
- + Guard with pivoting edge segment
- + Genuine operation thanks to conveniently placed and dust-protected on/off switch
- + 4 metres PUR H07-BQF cable: wear-resistant, flexible and highly resistant to cuts and abrasions
- + Spindle lock
- + Sanding specialist for refurbishing, renovating, modernising, processing stainless steel, metal, natural/artificial stone, wood surfaces, painted surfaces

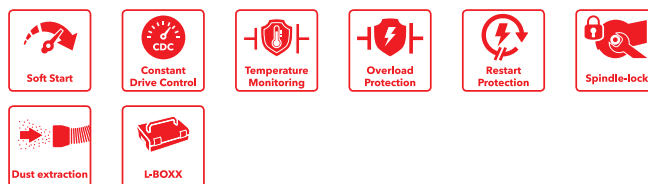

### Technical data

Power consumption	1400 W
Power output	880 W
Voltage	230 V
Frequency	50/60 Hz
Max. disc diameter	150 mm
Max. support plate size	150 mm
No-load speed	600 - 2100 rpm
Tool holder, rotary grinder	M14
Cable length	4.0 m
Cable type	PUR
Dimensions WxLxH	405 x 200 x 120 mm
Weight	2.6 kg

### Standard equipment

- 1 Extraction hood with pivoting edge segment (419176)
- 1 Side handgrip (391581)
- 1 Hook-and-loop backing pad (419192)
- 1 Handle (450774)
- 1 Face pin spanner (398365)
- 1 Hexagon socket wrench (102229)
- 1 Hexagon socket wrench (392731)
- 3 Cable clip (252188)
- 4 Sheets of sandingpaper Ø 150 mm
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (414158)