
Hook-and-loop sanding paper ZIRCOFLEX

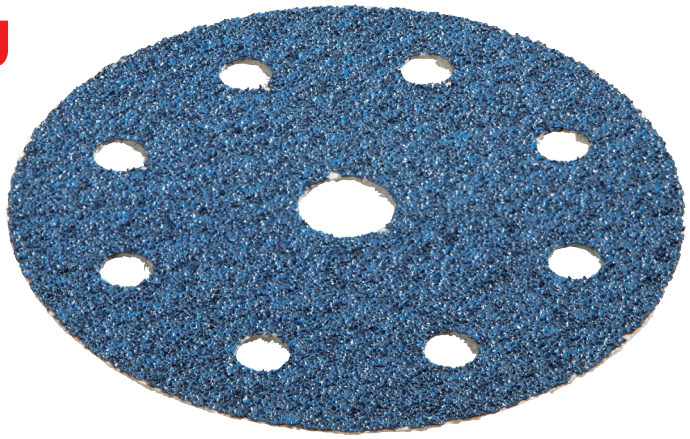

Ideally suited for high removal rates and high load on wood and metal substrates. The support fabric is extremely tear-resistant and is characterised by high cost-effectiveness. Can be used with hook-and-loop pad max. Ø 125 mm.

Technical data

Designation	Grit	Diameter	Order no.	GTIN	Qty.
D125-8 ZI-A40 VE25	A 40	125 mm	393185	4030293165144	25
D125-8 ZI-A60 VE25	A 60	125 mm	393193	4030293165137	25
D125-8 ZI-A80 VE25	A 80	125 mm	393207	4030293165120	25
D125-8 ZI-A40 VE12 Xtreme	A 40	125 mm	532039	4030293258792	12
D125-8 ZI-A60 VE12 Xtreme	A 60	125 mm	532040	4030293258808	12
D125-8 ZI-A80 VE12 Xtreme	A 80	125 mm	532041	4030293258815	12