

# PE 14 LD C


Rotary polisher

Order no. 535118

GTIN 4030293289581



- + With its wide speed range it is perfect for working with polishing pads from Ø 75 mm upto max Ø 150 mm
- + Ideal speed range for automotive, maritime and aviation applications
- + Perfectly suited for removing deep scratches and for reconditioning heavily-weathered paintwork
- + Flat gear head reduces distance to the surface. The machine can therefore be operated safely in any position.
- + Powerful 1400 watt motor with highly-efficient ventilator for optimum cooling
- + Accelerator switch for a slow and gentle start
- + VR microprocessor control: with tachogenerator constant speed control, soft start, continuous speed control trigger, restart protection after power failure, overload protection, temperature monitoring and speed selection
- + Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- + With rubberised resting bar for safe setting down
- + Streamlined handle section for perfect handling

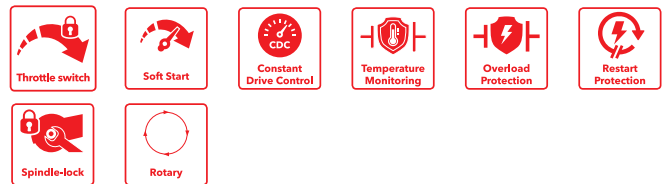

## Technical data

Power consumption	1400 W
Voltage	230 V
Frequency	50/60 Hz
Max. support plate size	150 mm
Max. polishing disc size	150 mm
No-load speed	1100 - 3700 rpm
Cable length	4 m
Cable type	Red plug
Dimensions WxLxH	463 x 72 x 110 mm
Weight	2.3 kg
Sound pressure level	81 dB(A)
Vibration	2.6 m/s <sup>2</sup>

## Standard equipment

[www.flex-tools.com](http://www.flex-tools.com)

this is performance **FLEX**