

XFE 2 21 14-EC C


Eccentric polisher with random orbital

Order no. 535001

GTIN 4030293288416



- + New generation of brushless motors delivering high efficiency and performance
- + Microprocessor electronics: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- + Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- + Flat gear head reduces the distance from the surface. This allows the tool to be guided perfectly in any position
- + Newly-developed high-performance gearbox for maximum noise and vibration reduction
- + Ergonomically-shaped handle areas with soft grip for perfect guidance on the surface
- + Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- + Ideal speed range for automotive, maritime and aviation applications
- + 21 mm polishing stroke for rapid progress, even on large surfaces
- + Ideal for repairing deep scratches right down to the finish
- + Maximum deep sheen in the FLEX 2-step system, with the black sponge and black polish
- + With rubberised resting bar for safe setting down

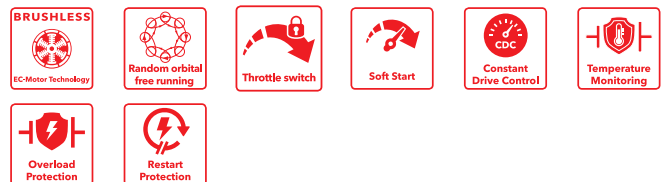

Technical data

Power consumption	1400 W
Voltage	230 V
Frequency	50/60 Hz
Max. support plate size	150 mm
Polishing stroke	21 mm
No-load speed	1350 - 4350 rpm
Orbit rate, no load	2700 - 8700 rpm
Cable length	6 m
Cable type	PUR
Dimensions WxLxH	425 x 125 x 128 mm
Weight	2.6 kg

Standard equipment

1 Special hook-and-loop pad, cushioned (487988)

