

## BSE 14-3 INOX Set


Burnishing machine and pipe belt sander TRI-NOXFLEX Set

Order no. 433454

GTIN 4030293187207



- + Microprocessor control: speed selection, tachogenerator constant speed control, soft start, restart protection after power failure, overload protection and temperature monitoring
- + Unique tool attachment with quick-action coupling for tool-free changing of the system attachments for burnishing and pipe belt sanding
- + Variably adjustable burnishing attachment, allows working close up to the edge, also suitable for narrow rollers, incl. edge guide. Tool-free grinding tool change via patented quick-change system
- + Completely cast electronic components prevents damage due to metal dust. The 3-fold winding protection reduces motor wear, increases service life
- + Sanding belt dimension: 760 x 40 mm
- + High-quality, spring-mounted sanding arm: light alloy with 2 deflection rollers. For optimum wrap-round on pipes, up to max. 270°
- + Sanding belt replacement: quick and tool-free
- + Spindle lock
- + Adjustable guard: for sanding tools up to Ø 125 mm
- + For optimum finishing of various materials, for burnishing, texturing, polishing, brushing, smoothing, de-rusting and deburring steel and stainless steel surfaces

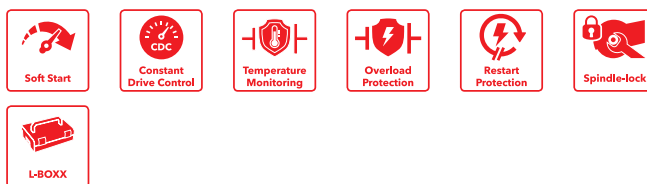

### Technical data

Power consumption	1400 W
Power output	880 W
Voltage	230 V
Frequency	50/60 Hz
Brush diameter	125 mm
Brush width	100 mm
No-load speed	1000 - 3500 rpm
Tool fixture, brush sander	19mm
Cable length	4.0 m
Dimensions WxLxH	320 x 210 x 195 mm
Weight	3.6 kg

### Standard equipment

- 1 Sanding attachment, pipe belt (433470)
- 1 Sanding attachment, burnishing (433462)
- 1 Rubber air roller (433896)
- 1 Air pump (256284)
- 1 Superfinishing band (326917)
- 1 Superfinishing band (326933)
- 1 Sanding belt MESHFLEX (326879)
- 1 Sanding belt MESHFLEX (326852)
- 5 Sanding belt CORUFLEX (326739)
- 5 Sanding belt CORUFLEX (326755)
- 5 Sanding belt CORUFLEX (434914)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (433918)