

RE 16-5 115 Kit, FK-S


RETECFLEX - the universal tool for renovation and modernization

Order no. 505005

GTIN 4030293230743



- + Microprocessor control: speed selection, tachogenerator constant speed control, soft start, restart protection after power failure, overload protection and temperature monitoring
- + Motor: powerful, strong motor for quick working progress
- + Anti-Kickback - this shuts down the motor on the tool being blocked
- + Completely cast electronic components prevents damage due to metal dust. The 3-fold winding protection reduces motor wear, increases service life
- + Special gearbox: special gear ratio for high torque in the medium and low speed range
- + With steplessly adjustable, vibration-proof, ergonomic bail handle, for optimum handling and machine control
- + Dust-proof on/off switch
- + Effective dust extraction thanks to a large extraction cross-section. Simple, quick connection using the FLEX clip-system. No adapters or reducing sleeves are required
- + Extraction hood: with stepless height adjustment
- + Universal tool system can be adapted for a large number of renovation and modernisation applications. Compact, handy and ideal for working on small surfaces and on the edges of larger areas
- + Spindle lock
- + Complete with 12 pointed hard metall carbide scouring discs. For removing hard plaster, concrete, foam backing and adhesive residues, paint on plaster, epoxy plaster, flexible protective coatings, plaster on wooden beams and latex/oil paints on plaster.

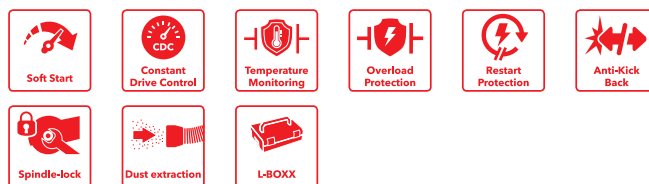

Technical data

| | |
|---------------------------------|-------------------|
| Power consumption | 1600 W |
| Power output | 950 W |
| Voltage | 230 V |
| Frequency | 50/60 Hz |
| Disc diameter | 115 mm |
| Scouring head diameter | 80 mm |
| Max. milling depth | 6 mm |
| No-load speed | 1900 - 5500 rpm |
| Tool holder, renovation grinder | Other |
| Cable length | 4,0 m |
| Dimensions WxLxH | 355 x 160 x 67 mm |
| Weight | 3,1 kg |

Standard equipment

- 1 Scouring head complete, pointed (503037)
- 1 Extraction hood (366528)
- 1 Base for scouring work (369314)
- 1 Hook-and-loop backing pad Ø 115, Bowl (535526)
- 1 Ring hole spanner, SW 13 (505072)
- 1 Face pin spanner (392537)
- 1 Hexagon socket wrench (102229)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (414182)
- 1 Bail handle
- 3 Fastening screws

www.flex-tools.com

this is performance **FLEX**