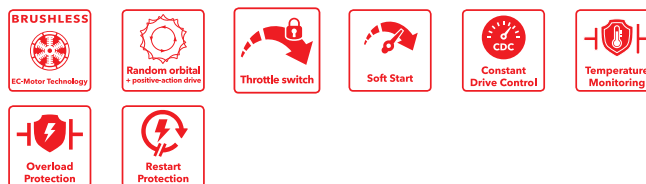this is proformance

FLEX

XCE 8 150 18-EC C

Cordless eccentric polisher with forced rotation

18 V

Order no. 532646

GTIN 4030293264861

- As powerful as a cable polisher over the entire battery life
- CDC constant electronics prevent speed fluctuations
- Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- Ideal speed range for automotive, maritime and aviation applications
- Perfect for removing medium scratches and for eliminating signs of wear and holograms
- Maximum efficiency in one step with the FLEX 1-step system, with the violet sponge and violet polish
- New generation of brushless motors delivering high efficiency and performance
- Newly-developed high-performance gearbox for maximum noise and vibration reduction
- Additional external gearbox enables rotary positive drive with simultaneous random-orbital movement
- Ergonomically-shaped handle areas with soft grip for perfect guidance on the surface
- Flat gear head reduces the distance from the surface. This allows the tool to be guided perfectly in any position
- With rubberised resting bar for safe setting down
- Microprocessor control with soft start, restart protection after power failure, temperature monitoring, overload protection
- Electronic management system (EMS) protects the machine, extends the service life, and increases efficiency
- LED battery capacity display
- FLEX battery system: suitable for all FLEX 18 V battery packs. Delivery does not include battery and charger

| BRUSHLESS EC-Motor Technology | Random orbital + positive-action drive | Throttle switch | Soft Start | CDC Constant Drive Control | Temperature Monitoring |
| Overload Protection | Restart Protection | | | | |

Technical data

Battery voltage	18 V
Battery capacity	2.5 / 5.0 / 8.0 Ah
Max. support plate size	150 mm
Polishing stroke	8 mm
No-load speed	225 - 700 rpm
No-load speed	
Orbit rate, no load	2700 - 8700 rpm
Orbit rate, no load	
Weight without battery pack	2.0 kg
Weight	
Sound pressure level in acc. with EN 60745	79 dB(A)
Vibration in acc. with EN 60745	5.1 m/s²

Standard equipment

1 Special hook-and-loop pad, cushioned (487988)