

## LE 14-7 125 INOX


1400 watt INOXFLEX, specialist for stainless steels and steel alloys, 125 mm

Order no. 406546

GTIN 4030293172616



- + Microprocessor control: speed selection, tachogenerator constant speed control, soft start, restart protection after power failure, overload protection and temperature monitoring
- + Special gearbox: special gear ratio for high torque in medium and low speed range. Prevents blue discolouration and distortion caused to the development of heat
- + Completely cast electronic components prevents damage due to metal dust. The 3-fold winding protection reduces motor wear, increases service life
- + Highly efficient and resilient motor for more power output
- + SoftVib handle with vibration cushioning
- + Tool-free adjustment of safety guard
- + Spindle lock
- + Single-pole switch

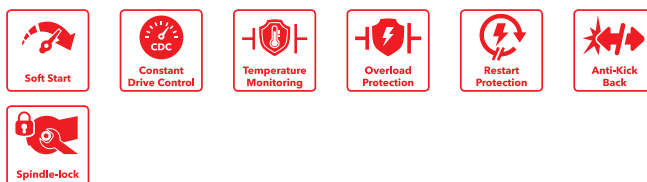

### Technical data

|                            |                   |
|----------------------------|-------------------|
| Power consumption          | 1400 W            |
| Power output               | 880 W             |
| Voltage                    | 230 V             |
| Frequency                  | 50/60 Hz          |
| Max. disc diameter         | 125 mm            |
| No-load speed              | 2100 - 7500 rpm   |
| Tool holder, angle grinder | M14               |
| Cable length               | 4,0 m             |
| Dimensions WxLxH           | 300 x 70 x 110 mm |
| Weight                     | 2,4 kg            |

### Standard equipment

- 1 Sanding guard (394394)
- 1 SoftVib side handle (530903)
- 1 Clamping flange, SW 14 (191612)
- 1 FixTec quick clamp nut M 14 (313459)
- 1 Dust cap (520527)