

PE 2 14-EC C


Rotary polisher

Order no. 532985

GTIN 4030293268258



- ⊕ New generation of brushless motors delivering high efficiency and performance
- ⊕ Microprocessor electronics: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- ⊕ Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- ⊕ Flat gear head reduces the distance from the surface. This allows the tool to be guided perfectly in any position
- ⊕ Newly-developed high-performance gearbox for maximum noise and vibration reduction
- ⊕ Newly-positioned spindle lock on the underside enables intuitive disc changes and prevents accidental operation
- ⊕ Ideal speed range for automotive, maritime and aviation applications
- ⊕ Perfectly suited for removing deep scratches and for reconditioning heavily-weathered paintwork
- ⊕ Maximum removal rate in the FLEX 2-step system, with the red sponge and red polish
- ⊕ Ergonomically-shaped handle areas with soft grip for perfect guidance on the surface
- ⊕ With rubberised resting bar for safe setting down
- ⊕ Simple speed adjustment via speed selection wheel with detent points accessible from both sides

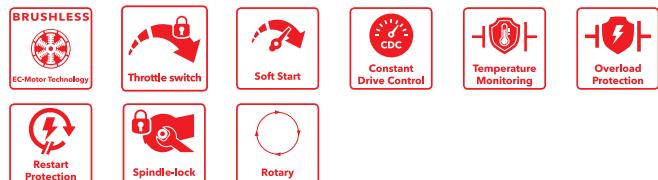

Technical data

Power consumption	1400 W
Voltage	230 V
Frequency	50/60 Hz
Max. support plate size	150 mm
Max. polishing disc size	150 mm
No-load speed	550 - 1800 rpm
Cable length	6 m
Cable type	PUR
Weight	2,3 kg
Sound pressure level	72 dB(A)
Vibration	2,5 m/s ²

Standard equipment

1 Hook-and-loop pad, cushioned M 14 (535703)