

LDE 16-8 125 R, Kit TH-Jet


Renovation grinder with variable speed for dust-free edge grinding, 125 mm.

Order no. 504971

GTIN 4030293230729



- + Microprocessor control with soft start, restart protection after power failure, temperature monitoring, overload protection, CDC-electronic feedback control
- + Reliable 1600 watt high-performance motor with sufficient power reserves
- + Dust extraction: prevents dust nuisance, reduces disc wear, keeps the concrete pores open for the new coating
- + Anti-Kickback - this shuts down the motor on the disc being blocked
- + Guard with pivoting segment to allow grinding right up to the wall. Height-adjustable to the disc height and for optimum dust extraction
- + With steplessly adjustable, vibration-proof, ergonomic bail handle, for optimum handling and machine control
- + For fast hose connection. FLEX clip connection for Ø 32 mm snap connection included in the standard equipment
- + Recessed spindle lock, to avoid unintentional activation
- + Variable speed for dust minimization in case of tool protrusion, as well as better control of finer work with less pressure, e.g. on edges, and during the final smoothing of surfaces
- + Ideally suited for processing walls, ceilings and floors. Efficient and economic working thanks to optimum coordination between machine and sanding disc
- + Diamond grinding disc suitable for grinding concrete parts, roughing old weathered concrete, hard cement plaster, removing shuttering protrusions and concrete runs, hardened epoxy resin coatings and the natural sintering on concrete components. High grinding capacity and service life from the innovative segment design. Optimal ground preparation for further coating.

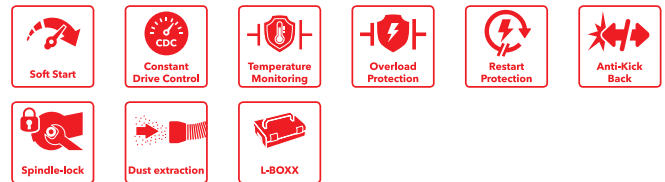

Technical data

Power consumption	1600 W
Power output	950 W
Voltage	230 V
Frequency	50/60 Hz
Disc diameter	125 mm
No-load speed	4500 - 7800 rpm
Tool holder, renovation grinder	M14
Cable length	4,0 m
Weight	3,1 kg

Standard equipment

- 1 Thermo-Jet diamond grinding disc (359378)
- 1 Extraction hood with pivoting edge segment (498475)
- 3 Cable clip (252188)
- 1 Hexagon socket wrench (102229)
- 1 Face pin spanner (392537)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert (414131)
- 1 Bail handle