

MS 1706 FR


Wall chaser for push and pull cutting

Order no. 329673

GTIN 4030293124813



- + Microprocessor electronics: with tachogenerator constant speed control, soft start, overload protection and temperature monitoring
- + Patented swivel-mounted motor (EP1693169) allows for push and pull cutting.
- + Optimal dust extraction and maximum safety due to enclosed guard
- + Tool-free blade changing and slit width adjustment
- + Rotating adaptor for dust extractor
- + Tool-free cutting depth adjustment
- + Plunge cut stop
- + Chases two parallel slots up to 35 mm deep and 30 mm wide
- + Slot breaker for easy removal of the remaining material without a hammer
- + This machine is also available in 110 V

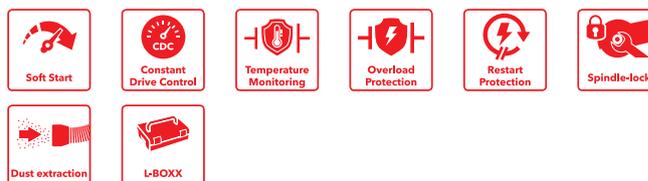

Technical data

| | |
|--------------------------|--------------------|
| Power consumption | 1400 W |
| Power output | 950 W |
| Voltage | 230 V |
| Frequency | 50/60 Hz |
| Cutting depth | 0-35 mm |
| Groove width | 10-30 mm |
| Disc diameter | 140 mm |
| Tool holder, wall chaser | M14 |
| Cable length | 4,0 m |
| Dimensions WxLxH | 410 x 180 x 250 mm |
| Weight | 4,6 kg |
| No-load speed | 7500 rpm |

Standard equipment

- 2 Diamantjet VI - Speedcut (534760)
- 1 Slot breaker (229253)
- 1 Clip adapter (408360)
- 1 Side handle, black (198633)
- 1 Carrying case L-BOXX® (414093)
- 1 Case insert

www.flex-tools.com

this is performance **FLEX**