

XFE 2 15 14-EC C


Eccentric polisher with random orbital

Order no. 532987

GTIN 4030293268272



- ⊕ New generation of brushless motors delivering high efficiency and performance
- ⊕ Microprocessor electronics: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- ⊕ Continuous speed control trigger: for a gentle start and a lock-on for continuous operation
- ⊕ Flat gear head reduces the distance from the surface. This allows the tool to be guided perfectly in any position
- ⊕ Newly-developed high-performance gearbox for maximum noise and vibration reduction
- ⊕ Ergonomically-shaped handle areas with soft grip for perfect guidance on the surface
- ⊕ Simple speed adjustment via speed selection wheel with detent points accessible from both sides
- ⊕ Ideal speed range for automotive, maritime and aviation applications
- ⊕ Perfect for eliminating holograms and removing light scratches
- ⊕ Maximum deep sheen in the FLEX 2-step system, with the black sponge and black polish
- ⊕ With rubberised resting bar for safe setting down

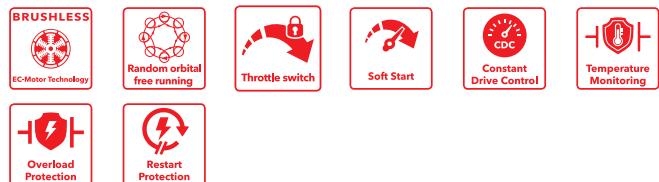

Technical data

Power consumption	1400 W
Voltage	230 V
Frequency	50/60 Hz
Max. support plate size	150 mm
Max. polishing disc size	150 mm
Polishing stroke	15 mm
No-load speed	1350 - 4350 rpm
Orbit rate, no load	2700 - 8700 rpm
Cable length	6 m
Cable type	PUR
Weight	2,3 kg
Sound pressure level	75 dB(A)
Vibration	3,1 m/s ²

Standard equipment

1 Special hook-and-loop pad, cushioned (487988)