

LE 14-7 125 INOX 110/ BS-4h


**1400 watt INOXFLEX, specialist for stainless
steels and steel alloys, 125 mm**

Order no. 406627

GTIN 4030293172692



- + Microprocessor control: speed selection, tachogenerator constant speed control, soft start, restart protection after power failure, overload protection and temperature monitoring
- + Highly efficient and resilient motor for more power output
- + Special gearbox: special gear ratio for high torque in medium and low speed range. Prevents blue discolouration and distortion caused to the development of heat
- + Completely cast electronic components prevents damage due to metal dust. The 3-fold winding protection reduces motor wear, increases service life
- + SoftVib handgrip with integrated, patented locknut wrench and vibration damping
- + Tool-free adjustment of safety guard
- + Spindle lock
- + Single-pole switch

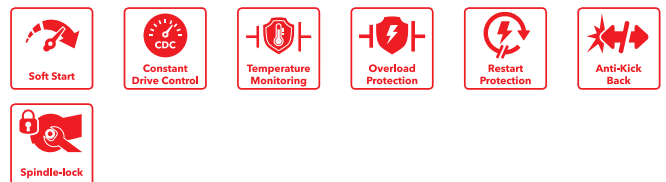

Technical data

Power consumption	1300 W
Power output	800 W
Voltage	110 V
Frequency	50/60 Hz
Max. disc diameter	125 mm
No-load speed	2100 - 7500 rpm
Tool holder, angle grinder	M14
Cable length	4.0 m
Dimensions WxLxH	300 x 70 x 110 mm
Weight	2.4 kg

Standard equipment

- 1 Sanding guard (394394)
- 1 SoftVib side handle (530903)
- 1 Clamping flange, SW 14 (191612)
- 1 FixTec quick clamp nut M 14 (313459)