www.flex-tools.com

this is proformance FLEX

L 1603 VR


Rotary sander

Order no. 533693

GTIN 4030293275331



- Ideally suited for polishing and sanding work on mineral bases, for cleaning and polishing metal surfaces, and for use with wire brushes and fibre discs
- Microprocessor control with soft start, restart protection after power failure, temperature monitoring, overload protection, CDC-electronic feedback control
- Electronics: Speed preselection with 6 settings
- Anti-Kickback - this shuts down the motor on the disc being blocked
- The grip guard directly over the tool enables precise guidance of the power tool
- Cushioned hook and loop disc for sanding and polishing applications
- Spindle lock

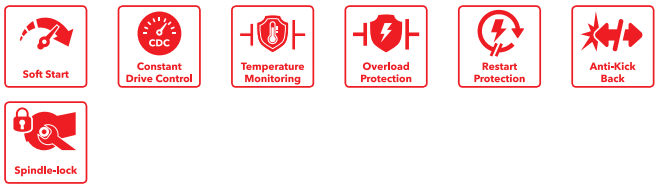

Technical data

Power consumption	1600 W
Voltage	230 V
Frequency	50/60 Hz
Max. disc diameter	125 mm
No-load speed	1400 - 3900 rpm
Tool holder, rotary grinder	M14
Cable length	4.0 m
Weight	2.0 kg

Standard equipment

1 Hook-and-loop pad, cushioned M 14 (350737)
1 Handle (450774)