

LD 18-7 150 R, Kit TH-Jet


1750 watt powerful grinding machine for working close to edges, 150 mm

Order no. 418773

GTIN 4030293182509



- + Microprocessor electronics: with consistent speed control, soft start, overload protection and temperature monitoring
- + Reliable 1800 watt high-performance motor with sufficient power reserves
- + Vacuum dust collection: protects against abrasive dust, reduces disc wear, keeps concrete pores for the new coat open
- + Recessed spindle lock, to avoid unintentional activation
- + With steplessly adjustable, vibration-proof, ergonomic bail handle, for optimum handling and machine control
- + Guard with pivoting segment to allow grinding right up to the wall. Height-adjustable to the disc height and for optimum dust extraction
- + Adapter for FLEX clip-system as standard equipment
- + 150 mm diameter, ideal for application on floor areas
- + Diamond grinding disc suitable for grinding concrete parts, roughing old weathered concrete, hard cement plaster, removing shuttering protrusions and concrete runs, hardened epoxy resin coatings and the natural sintering on concrete components. High grinding capacity and service life from the innovative segment design. Optimal ground preparation for further coating.

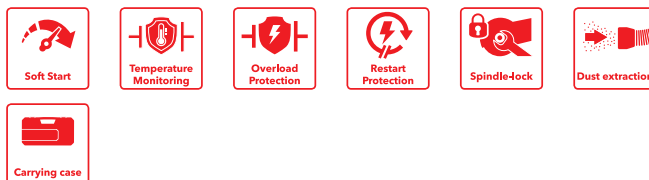

Technical data

Power consumption	1750 W
Power output	1200 W
Voltage	230 V
Frequency	50/60 Hz
Disc diameter	150 mm
No-load speed	7000 rpm
Tool holder, renovation grinder	M14
Cable length	4.0 m
Dimensions WxLxH	495 x 190 x 86 mm
Weight	4.3 kg

Standard equipment

- 1 Thermo-Jet diamond grinding disc (418919)
- 1 Extraction hood with pivoting edge segment (419176)
- 3 Cable clip (252188)
- 1 Hexagon socket wrench (102229)
- 1 Clamping nut M 14 (100080)
- 1 Face pin spanner (392537)
- 1 Carrying case (444391)
- 1 Bail handle